

19" rack platform for data center



X SERIES[®]

Heavy Duty Server Rack



NEW
75 % Perforation




1



2

X SERIES® Strong points


- 1 9 fold welded construction**
Proven technology based on fully welded offers high flexibility and stability. The welded structure in the frame guarantees freely selectable arrangement of accessories.
- 2 X SERIES New heavy duty rack (Open Frame)**
Increased stability compared with the classic XSERIES for static loads of 1,400kg and more. Use of newly designed more stable extrusions and new, heavy duty corner welded.
- 3 X SERIES New heavy duty rack (Primary)**
Includes 1 open frame, 2 perforated steel door, 2 side panels, 1 fully vented top panel, 2 pair 19" panel mount angle, 3 pair horizontal mount support, 4 castor, 4 leveling feet.
- 4 IP seal Protect**
Front, rear and side door full length high-grade steel IP seal for protection and environmental influences.
- 5 Cable management**
Top cover provided four Ø100mm. cable access and cover, Guaranteed orderly and space-saving cable management. Adjustment at installation site, cable management can be selected from extensive range of accessory components.
- 6 Flexible ventilation components**
The correct ventilation solution is always provided by the corresponding selection of accessory components. Still applicable form XSERIES: 75% perforation, which guarantees unobstructed airflow of the installed components.
- 7 PDU Mounting Kit**
Easily mount all power distribution unit.




3



4

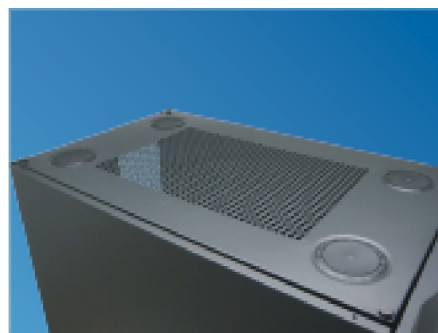


5

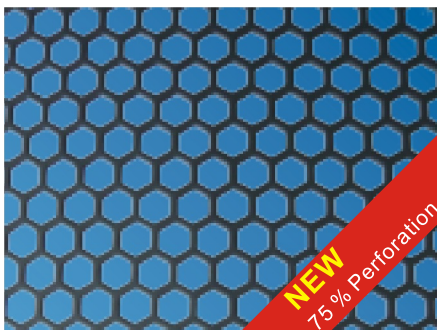

6

NEW
75% Perforation

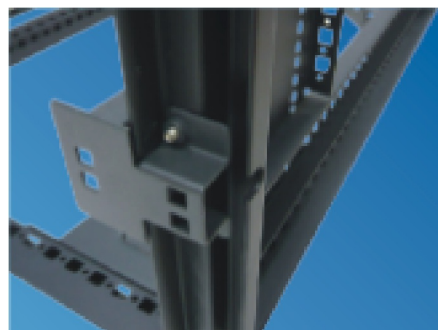



7

Heavy Duty for Static Loads of up to 1400kg

MAX Load

X Series Structure

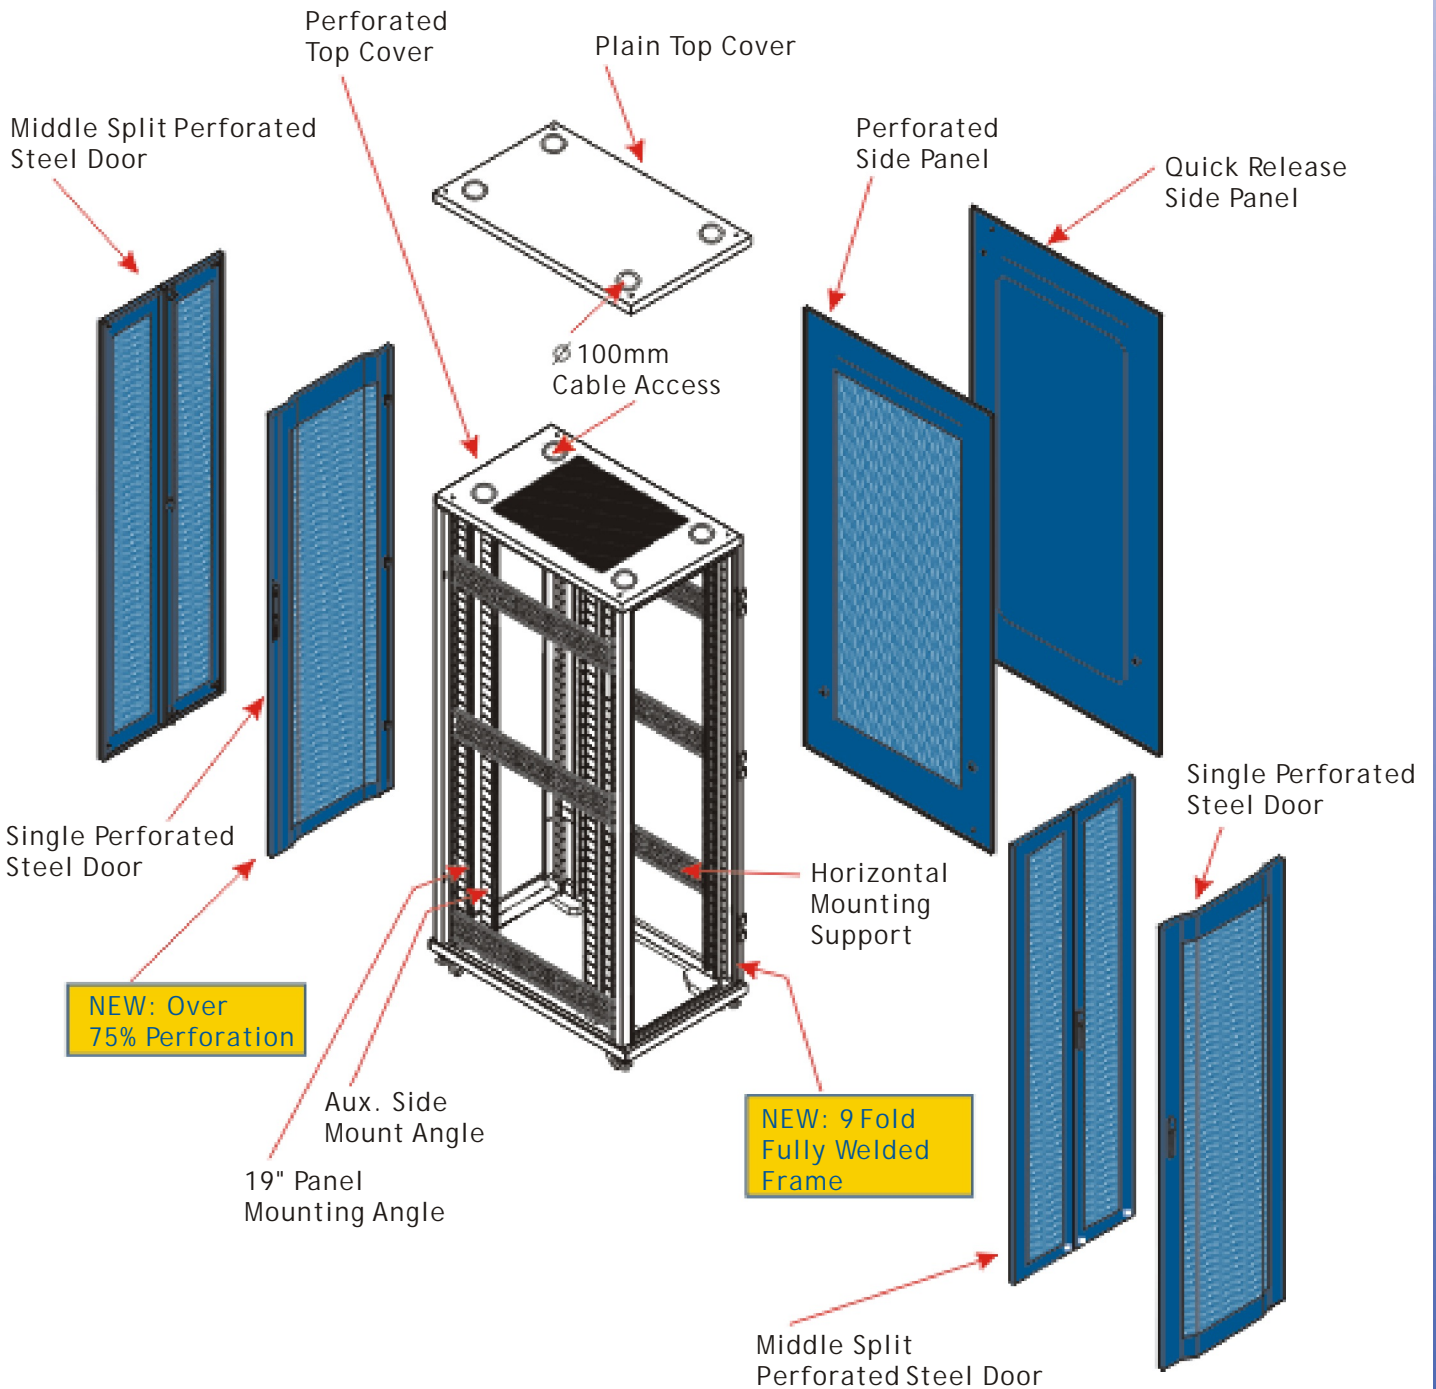


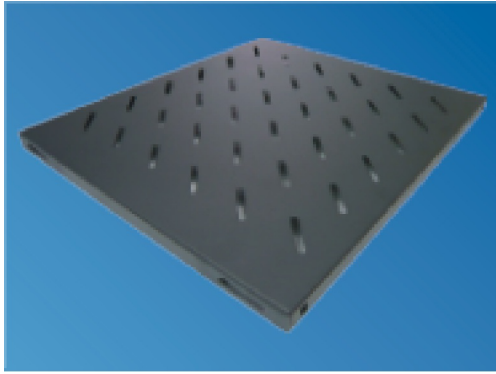

FIXED SHELF

Shelf assembly to 19" panel mounting angles allow mixed installation with 19" distribution panels.
Material: 1.5mm Steel

Order Code	Mounting	Depth	Used on	Loading (kg)
XFT37	19"	370 mm	600mm deep rack	80
XFT45	19"	450 mm	800mm deep rack	80
XFT60	19"	600 mm	900mm or above deep rack	150
XFTD60	19"	600 mm	900mm or above deep rack	200
XFT70	19"	745mm	900mm or above deep rack	150
XFTD70	19"	745mm	900mm or above deep rack	200

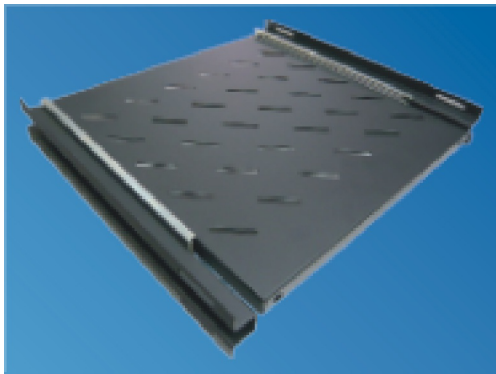

SLIDING SHELF

Shelf assembly to 19" panel mounting angles allow mixed installation with 19" distribution panels.
Material: 1.5mm Steel

Order Code	Mounting	Depth	Used on	Loading (kg)
XFST37	19"	370 mm	600mm deep rack	35
XFST45	19"	450 mm	800mm deep rack	35
XFST60	19"	600 mm	900mm or above deep rack	35
XFSTD60	19"	600 mm	900mm or above deep rack	100


Power Distribution Unit (U.K)

Applications


- Data Center
- Computer workstations
- Lan racking
- Security systems
- UPS power distribution
- Industrial enviroment

Specification

- IEC 60309
- Operating Voltage: 250V AC 50/60Hz
- Rate load current: 13A
- Max. Power Pmax: 3250W
- Operating temperature range: -20°~ + 70°
- Power indicator : Red LED

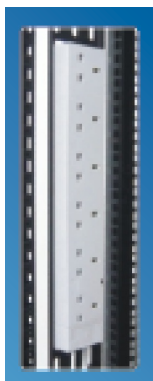

L6 (Non Switch)
Vertical Mounting

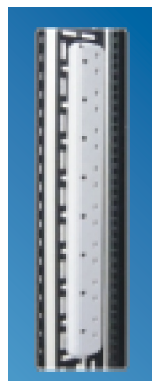

L8 (Non Switch)
Vertical Mounting

Metal Case

Power Distribution Unit(U.K)

